



For Earth, For Life
Kubota

T

KUBOTA LAWN TRACTOR T-Series T2090/T2290

Easy to operate, fun to drive, the Kubota T-Series is durable, and packed with premium features to keep you mowing efficiently and comfortably.



*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.

NEW T SERIES

T2090/T2290



Everything you want in a premium lawn tractor and more

Step up to the Kubota T-Series and get more of everything you want in a premium lawn tractor. More comfort to keep you relaxed and refreshed. More convenience to make the job easier. More efficiency to get the job done fast. And, of course, more Kubota dependability and durability to keep your T-Series doing what the T-Series does best: making your lawn look great.



New fabricated mower deck



High-back suspension seat with armrest*

**Suspension and armrest standard on T2290 only*

**WARRANTY* :
4 YEARS / 300 HOURS**



- A.** New high power engine
- B.** High-back seat
- C.** 12V power outlet



- D.** Heavy-duty frame
- E.** Cast iron front axle
- F.** Small turning radius: just 14"
- G.** New fabricated mower deck
- H.** Ergonomic operator layout

**Please see the Kubota Owner's warranty information guide for full details.*

Designed for comfort.

The T-Series was designed with one goal in mind: to make your job as easy and comfortable as possible. Everything about the T-Series says “comfort,” from the supremely soft and supportive high-back seat to the spacious full-flat operator platform. Operating the T-Series is also easy, making short work of even long mowing jobs.

Short 14" rear wheels' turning radius

Just 14" is all you need to turn a T-Series lawn tractor, letting you easily manoeuvre around posts, light fixtures, and other hard-to-mow-around objects. This short turning radius also comes in handy when transporting and storing your T-Series lawn tractor.



Easy cutting height adjustment from your seat



1 Pull the lever to lift the deck



2 Use the dial to adjust the cutting height




3 Release the lever to lower the deck

Reverse
Forward

Hydrostatic transmission

All T-Series lawn tractors incorporate a pedal foot-operated hydrostatic transmission that simplifies control of speed and direction, leaving your hands free at all times for precise steering around trees and shrubs or manoeuvring in confined spaces.

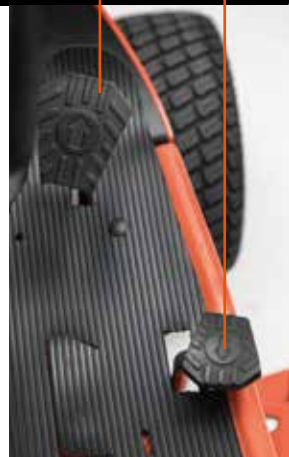

Yours.



High-back seat

For extra cushioning and support, all T-Series lawn tractors are equipped with a high-back seat that can be adjusted to accommodate drivers of different sizes. Dual armrests are standard on T2290. It's a level of comfort you'll soon appreciate after just minutes in the driver's seat.



Suspension seat (T2290)

The T2290 features a high-back suspension seat with parallel link suspension that provides an even greater level of comfort and support. The seat adjusts a full 4 inches forward and back, letting you find just the right position for you.



New steering wheel

A new, thicker, easier to grip steering wheel ensures maximum control and ease of operation while reducing vibrations. The steering wheel is positioned higher to reduce fatigue and enhance operator comfort and control.

“Mowing is easier—
and more comfortable—
since I gave the job to
my T-Series.”

Flat foot rest

The T-Series features the flattest foot platform in its class—no bumps, no humps, nothing to get in the way of your feet and your comfort as you work. Getting on and off the machine is easier too!



Ready when you are.

Built Kubota-strong, the T-Series won't let you down. You can be sure that when you are ready to go to work, your Kubota T-Series lawn tractor will be ready, too.



New high power petrol engines

Rugged and dependable petrol engines have plenty of power to get you up the hill without puffing or stalling. Both the T2090 and the T2290 have powerful 2-cylinder V-twin engines that produce 20 hp* (T2090) or 21.5 hp** (T2290).

* Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.
** These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

WARRANTY* :

4 YEARS / 300 HOURS

Enhanced durability


A new pipe-frame structure enhances the T-Series' already exceptional durability, rigidity, and strength. Even under tough terrain conditions, irregular lawn layouts, or operation on steep slopes, your T series lawn tractor will continue to provide years of dependable service.

*Please see the Kubota Owner's warranty information guide for full details.



Front axle

Cast from FCD (ductile cast iron), the T-Series' strong and durable front axle easily handles the bumps and shocks of extreme mowing jobs to ensure a long and dependable service life.

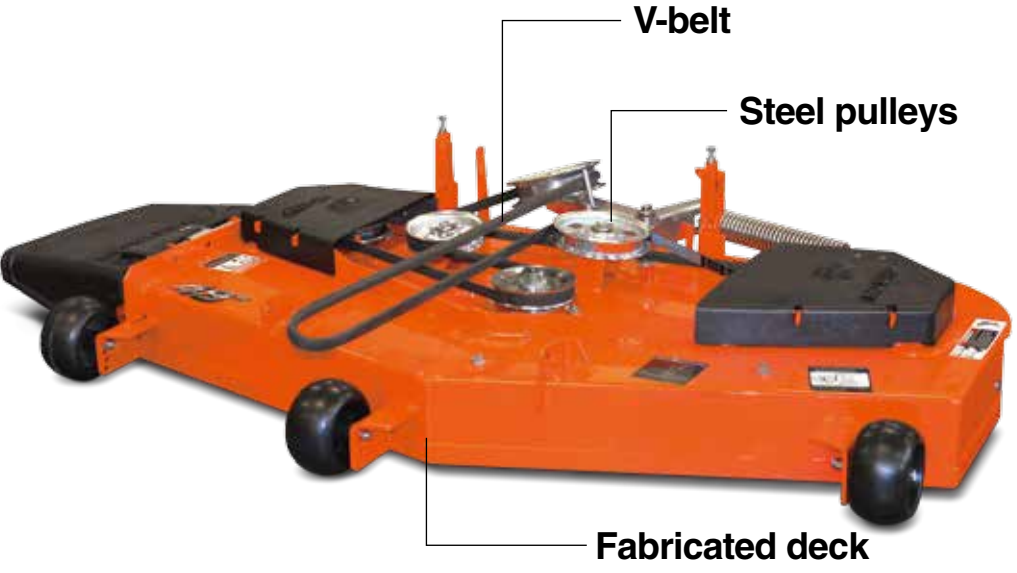

V-belt

Steel pulleys

Fabricated deck



Fabricated mower deck

The mower deck has also been upgraded to improve durability. Fabrication gives the T-Series' mower deck excellent rigidity and strength ensuring years of trouble-free operation and reduced maintenance.

Mulching kit (optional)

An optional mulching kit converts the mower deck into a high-precision mulching deck that produces an even finer mulch and sends it straight back into the turf.


Grass catcher (optional)

The optional grass catcher can be attached and detached without ever requiring the use of any tools.



“ My T-Series is dependable. I can count on my T-Series to always be ready to do the job. ”

Specifications

Model		T2090BR-42	T2290KW-42	T2290KWT-48
Engine	Model	GH660V		GH739V-3
	Type	Air cooled 2 cylinders petrol engine		
	Gross Horsepower	HP	20*	21.5**
	Total displacement	cu.in. (cc)	40.0 (656)	44.3 (726)
	Starting system		Key switch	
Dimensions	Overall length	mm	1900	1910
	Overall w/ Mower	mm	1392	1540
	width w/o Mower	mm	1010	
	Overall height	mm	1305	1310
Minimum Ground Clearance	mm	140		145
Wheel Base	mm	1295		
Tyre / Tread	Front tread	mm	816	
	Rear tread	mm	760	755
	Tyre size	Front tyre	15 x 6.0 - 8	16 x 6.0 - 8
	Rear tyre	20 x 10.0 - 10	22 x 10.0 - 10	
Weight (w/ Mower)	kg	268	277	298
Minimum Turning Radius	in. (mm)	14 (35.6)		
Transmission		Hydro-Gear® T3HD®		Hydro-Gear® G730®
Transmission System		1-HST w/ Gear Reduction		
Speed Control		Foot Pedal		
Travelling speed range	Forward	km/h	0 - 9.2	0 - 10.8
	Reverse	km/h	0 - 5.6	0 - 6.4
Braking system (Parking brake)		Disc brake / Foot pedal		
PTO	Type	Belt drive		
	Clutch Type	Electric clutch		
	PTO brake	Dry disc		
Mower Deck	Model	RCK42P-90T		RCK48P-90T
	Mower deck type	Side discharge		
	Mower lift system	Mechanical / Hand Lever		
	Deck depth	mm	114	
	Belt type	Single-Belt		
	Deck steel thickness	mm	3.0	3.4
	Anti scalp roller	Rigid		
	Cutting width of mower	in. (mm)	42 (1067)	48 (1219)
	Number of blades		2	3
	Cutting height	in. (mm)	1.0 - 4.0 (25 - 102), 1/4" increment	
Mounting system of mower		Parallel linkage		
Seat		Deluxe high back seat	Deluxe high back seat with armrest and suspension	
Engine stop system		Key stop		
Fuel tank capacity		13.6		
Battery	ℓ 	U1 (12V, RC:45min, CCA:300, CA:410)		
Generator capacity	amp	16	15	
Hour meter		Standard		

* Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

**These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables. The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.



©2017 Kubota Corporation

KUBOTA Tractor Australia Pty Ltd

25-29 Permas Way, Truganina VIC, 3029 Australia
 Freecall: 1800-334-653
 Email: sales@kubota.com.au

Web Site: <http://www.kubota.com.au>

CB Norwood Distributors Ltd

888 Tremaine Avenue, Palmerston North,
 4440 New Zealand
 Tel: 06-356-4920
 Email: info@norwood.co.nz

Web Site: <http://www.kubota.co.nz>

**Kubota
 Genuine Parts**
 for maximum
 performance,
 durability and
 safety

